# Create autostart launcher

Un utilitaire **python / GTK** afin de créer un script de démarrage automatique suite à une connexion au gestionnaire X.

Fonctionne quelque soit le **Display Manager**.

## Dépendances requises

**python3, python3-gi, python3-pil**

## Modification système

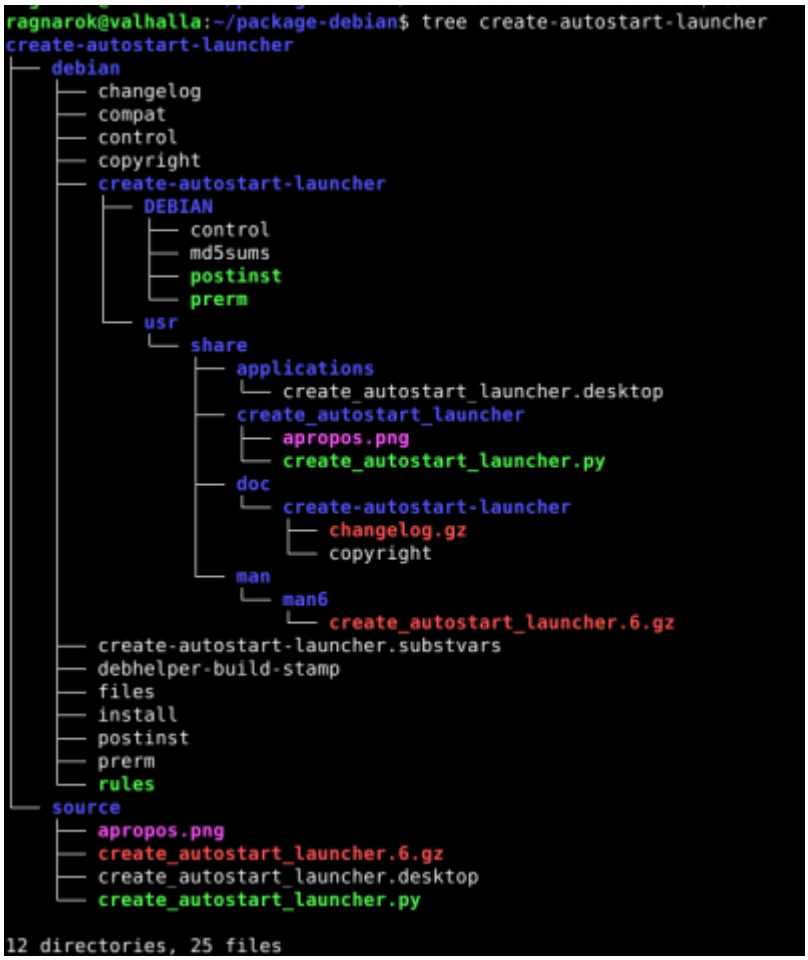


Création du fichier d'autostart dans le répertoire courant de l'utilisateur

```
/home/$USER/.config/autostart/LeNomDuLanceur.desktop
```

***Structure de ce fichier:***

```
[Desktop Entry]
```

```
Type=Application
Name=<Name of application as displayed>
Exec=<command to execute>
Icon=<full path to icon>
Comment=<optinal comments>
X-GNOME-Autostart-enabled=true
```

# Screenshoot

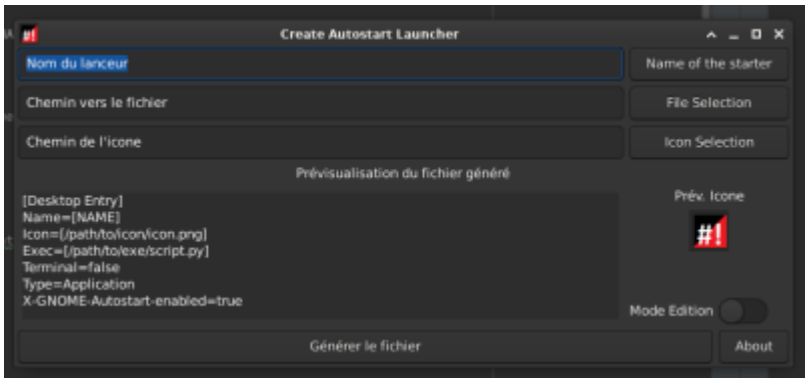


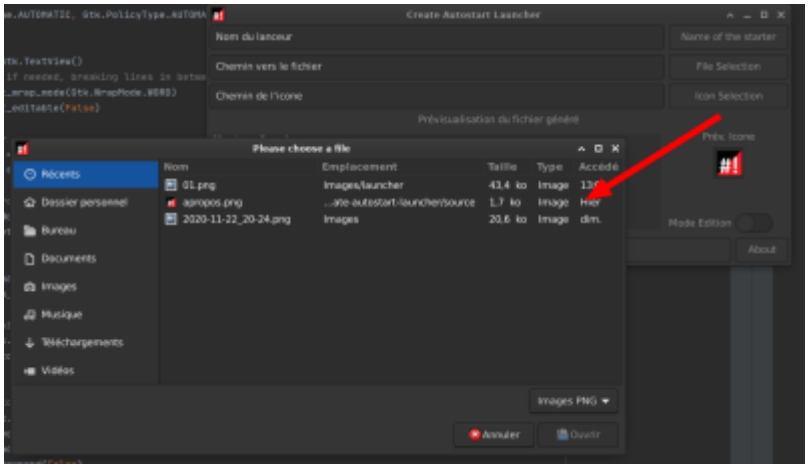

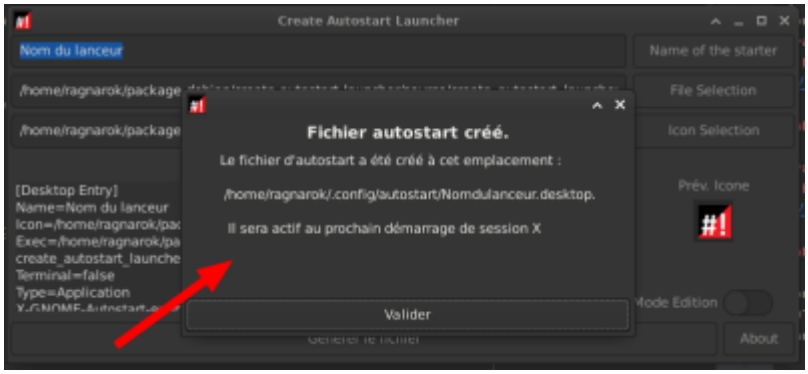


# GIT

Attention prendre la version la plus récente du GIT

GIT : sources et packages .deb </WRAP> ===== Installation ===== ==== Installation ==== <WRAP center round important 60%> Prendre la version la plus à jour du GIT [[https://github.com/CyrilleBiot/create_autostart_launcher|https://github.com/CyrilleBiot/create_autostart_launcher

```
wget https://github.com/CyrilleBiot/create_autostart_launcher/raw/main/create-autostart-launcher_1.2.1_all.deb

# dpkg -i create-autostart-launcher_1.2.1_all.deb
```

Au besoin

```
# apt-get install -f
```

## Suppression

```
# dpkg -r create-autostart-launcher
```

From:
https://cbiot.fr/dokuwiki/ - **Cyrille BIOT**

Permanent link:
**https://cbiot.fr/dokuwiki/python:create-autostart-launcher?rev=1606332393**

Last update: **2020/11/25 19:26**